





SV10


Dimensional Drawing

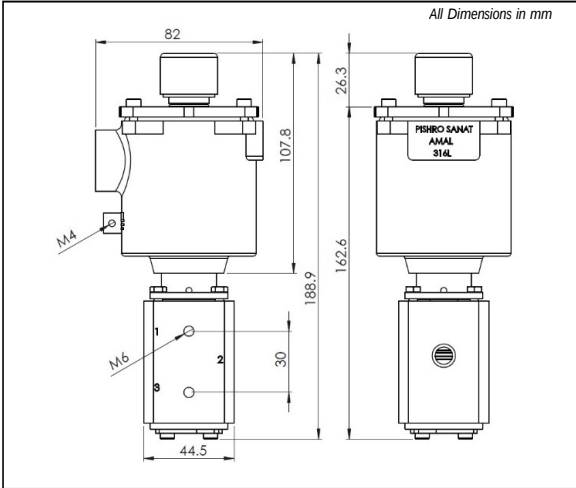

Schematic



Wiring



3D View



Weight: 2.35Kg Cv Value: 0.70

Certification



SV10-B1-04-32-NE-V-EDA-24D-57

SV10	Direct Acting Solenoid Valve	Model Code
B1	145 psi / 10 bar Maximum Valve Pressure	Operator
04	1/4" Port - Stainless Steel	Connections
32	3-way, 2-position	Valve Configuration
NE	Normally Each Position	Valve Configuration
V	Viton -20°C to +90°C	O-ring Material
ED	Ex d	Solenoid
A	ATEX/IECEx Dual Certified/Labelled	Solenoid Approval
24D	24VDC	Voltage
	Auto/Manual Reset	Options
57	5.7 Watts	Power
	M20 x 1.5 Cable Entry	Cable Entry
	NPT Ports	Port Type
	No Identifier	Identifier
SV10 -B1 -04 -32 -NE -V -ED A	-24D -57	Model Number

Solenoid T-Rating

Ex d IIC Gb	T4 T135°C	(-60°C ≤ Tamb ≤ +90°C)
Ex tb IIIC Db	T5 T100°C	(-60°C ≤ Tamb ≤ +55°C)
	T6 T85°C	(-60°C ≤ Tamb ≤ +40°C)

This is a datasheet. For further details on the complete range, please refer to catalogue.